


## FD30 Flush



Note: for strict spindle height refer to section 4.8

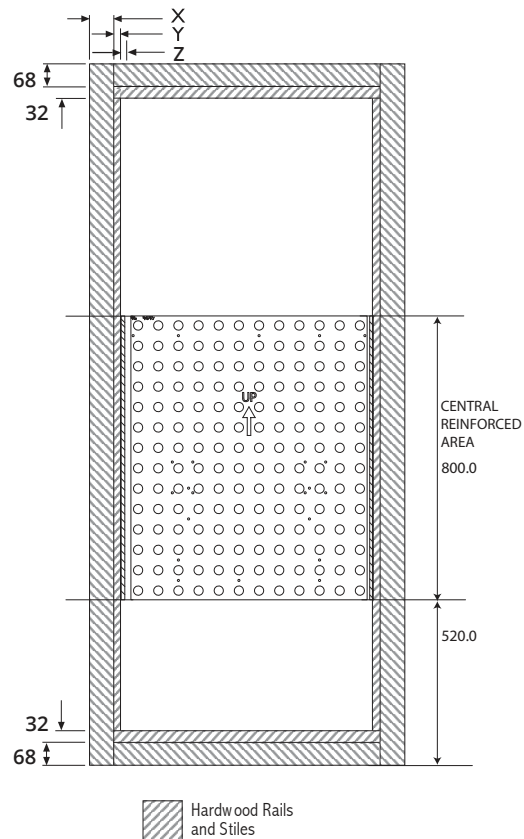


Hardwood Rails and Stiles

Structural Dimensions					Trimability		
Door Blank Size	A	X	Y	Z	Top	Sides (each)	Bottom
762 x 2013mm	95.3mm	48mm	32mm	10mm	40mm	20mm	70mm
838 x 2013mm	133.4mm	68mm	32mm	10mm	40mm	40mm	70mm
914 x 2013mm	171.5mm	68mm	32mm	10mm	40mm	40mm	70mm

- Notes:
- The first 40mm height trim to be taken from top of blank ( 2013-1973).
- Its recommended that all exposed timber edges are treated/sealed to prevent moisture penetration/contamination to avoid functional issues or mould growth
- All flat/ apartment entrance fire doors should be fitted with a self-closing device, as per Building Regulations Approved Document B (Fire Safety) Volume 1 Appendix C5

## Cassette Configurations

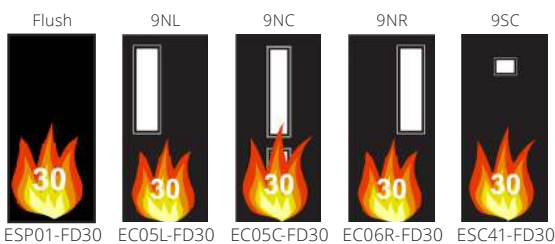

Cassette: 9N  
Glass Size: 202 x 154

Aperture Cut Out  
Dry Glaze: 236 x 186

Cassette: 9S  
Glass Size: 202 x 154

Aperture Cut Out  
Dry Glaze: 236 x 186

Note: bespoke small size flush door blanks are available on factory pallet order. Refer to section 5 of the latest version of WF419661 field of application report and contact the office to discuss your requirements.